

RS1XF SERIES

SURFACE MOUNT FAST RECOVERY RECTIFIER

产

品

规

格

确

认

书

RS1AF THRU RS1MF



康比電子
HORNBY ELECTRONIC

SURFACE MOUNT FAST RECOVERY RECTIFIER

REVERSE VOLTAGE: 50 to 1000 VOLTS

FORWARD CURRENT: 1.0 AMPERE

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- For surface mounted applications
- Low profile package
- Easy pick and place
- Built-in strain relief
- Fast Recovery times for high efficiency
- High temperature soldering : 250°C /10 seconds at terminals


MECHANICAL DATA

Case: Molded plastic, SMAF

Terminals: Solder plated, solderable per MIL-STD-750, method 2026 guaranteed

Polarity: Color band denotes cathode end

Packaging: 12mm tape per EIA STD RS-481

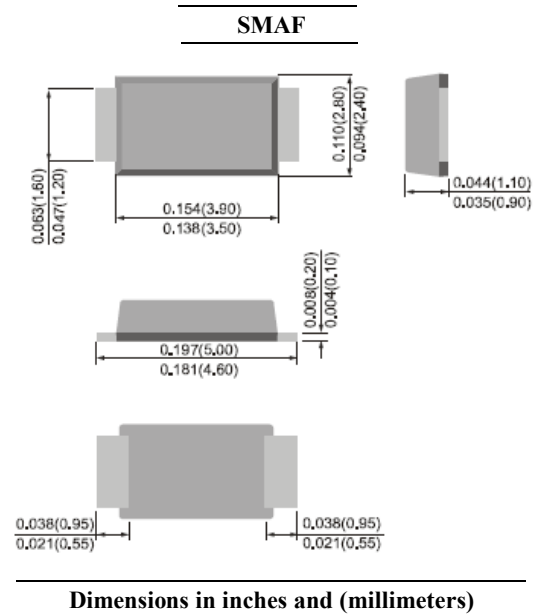

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	RS1AF	RS1BF	RS1DF	RS1GF	RS1JF	RS1KF	RS1MF	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current See Fig.1	$I_{(AV)}$	1.0							Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	30							Amp
Maximum Forward Voltage at 1.0A	V_F	1.30							Volts
Maximum Reverse Current at $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage $T_A=125^\circ\text{C}$	I_R	5.0 50							μAmp
Typical Junction Capacitance (Note 1)	C_J	15				7			pF
Typical Thermal Resistance (Note 2)	$R_{\theta JL}$	31							$^\circ\text{C/W}$
Maximum Reverse Recovery Time (Note 3)	T_{RR}	150				250	500		nS
Operating Junction Temperature Range	T_J	-55 to +150							$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55 to +150							$^\circ\text{C}$

NOTES:

- 1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.
- 2- Mounted on a FR4 PCB, single-sided copper, mini pad.
- 3- Reverse Recovery Test Conditions: $I_F=0.5\text{A}$, $I_R=1\text{A}$, $I_{RR}=0.25\text{A}$.

RS1AF THRU RS1MF

SURFACE MOUNT FAST RECOVERY RECTIFIER

RATINGS AND CHARACTERISTIC CURVES

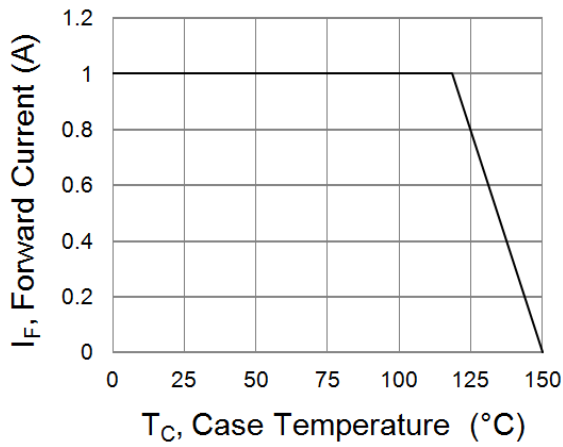


Fig.1 Forward Current Derating Curve

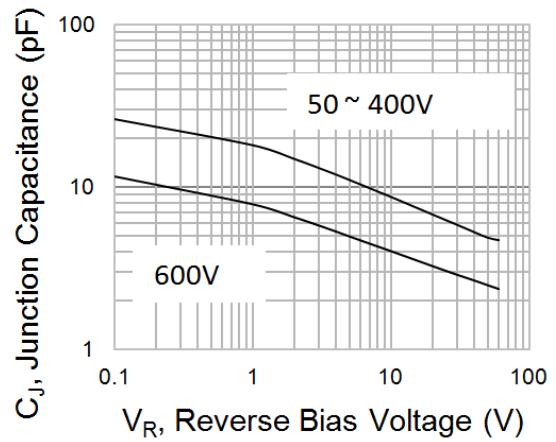


Fig. 2 Typical Junction Capacitance

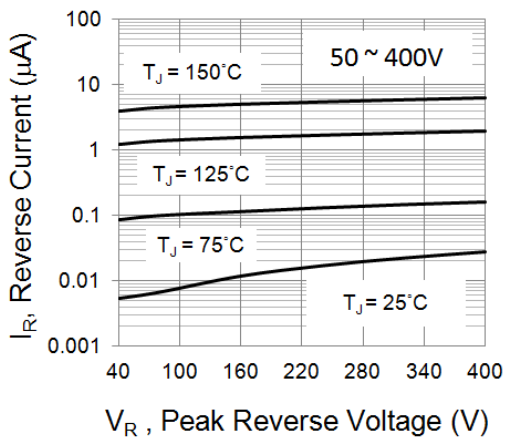


Fig.3 Typical Reverse Characteristics

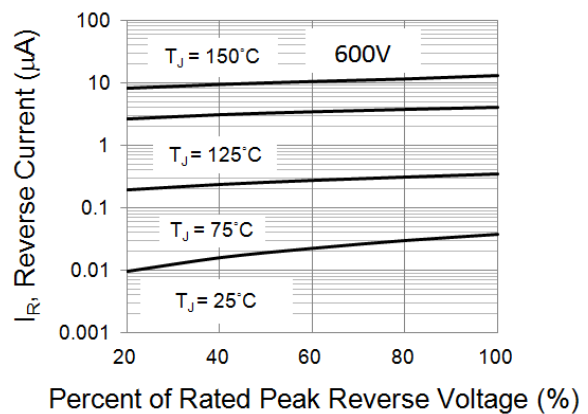


Fig.4 Typical Reverse Characteristics

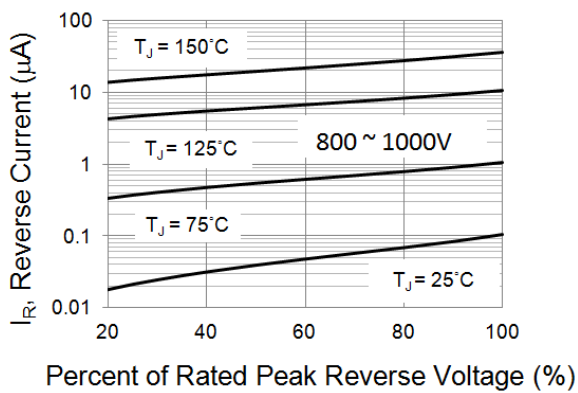


Fig.5 Typical Reverse Characteristics

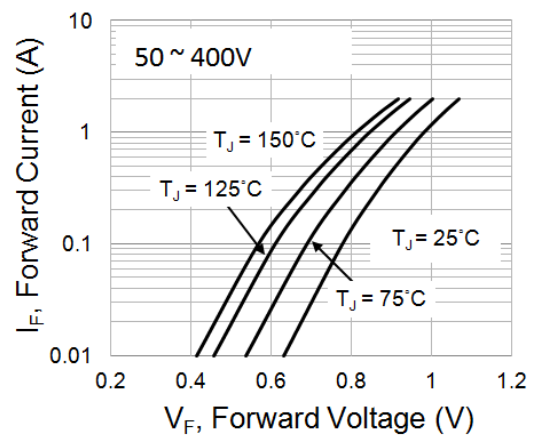


Fig.6 Typical Forward Characteristics